


KWC
AVA





A photograph of a modern, minimalist shower stall. The stall features a glass door on the left and a chrome shower head and handheld shower wand mounted on a wall. The floor is made of large, light-colored tiles. The overall aesthetic is clean and modern.

Pared down
to the pure
essentials



KWC AVA will satisfy both your fine sense of style and your requirement for reliable Swiss quality and state-of-the-art technology. With this faucet, you are sending out a clear message in your kitchen or bathroom: whoever lives here knows precisely what he or she wants.

**Up and down**

The flat lever is KWC AVA's trademark feature. Elegantly slim, it nevertheless fits extremely snugly in your hand, ensuring that KWC AVA cuts a fine figure in any position.

Details that make all the difference



Cool and controlled

The faucet helps to raise your awareness of how you use water. Thanks to the energy-saving coolfix® technology, cold rather than lukewarm water flows when the lever is in its central position, which inevitably reduces your hot water consumption.







Room for ideas




Tailor your bath and shower time to suit you with a wide range of options for a faucet that fits your style and preferences. From showers to bathtub mixers and convenient thermostat solutions to surface-mounted or concealed units, you decide what your bathroom can do for you.

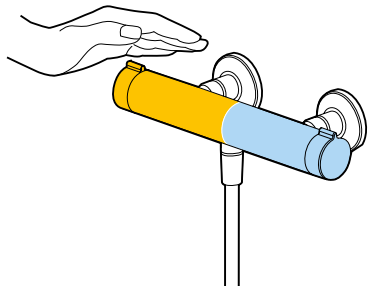


touchcontrol (on thermostats only)
This water guidance system with its 'double skin' principle ensures that users are never burned by their KWC faucet. The insulated hot water supply keeps the body of the faucet warm without letting it get too hot.

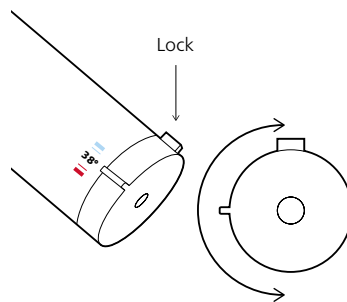

hotcontrol (on thermostats only)
Faucets with hotcontrol technology only supply water at temperatures above 38° C if the safety button on the temperature controller has been pressed deliberately. If the cold water supply fails, the hot water flow is automatically stopped immediately.

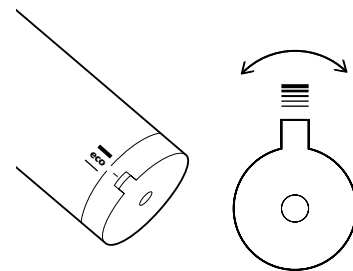

smartcontrol (on thermostats only)
smartcontrol keeps an eye on water consumption. Tangible resistance in the turning handle limits the amount of outflowing water. To switch off the economy mode, twist the handle back past the catch point.

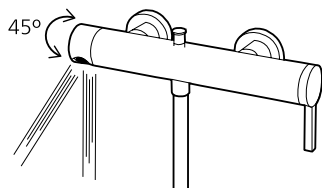

Bathtub spout

The bathtub spout, which is almost completely concealed inside the cylindrical body, can be rotated 45°, so you can control the direction of the water spray in a single turn.

Shower head with ball joint

The KWC PIATTO Q shower head features a practical ball joint. To avoid limescale build-up and dirt deposits, simply tilt the shower head. This allows any residual water to drain off and prevents dripping.

Swivelling shower arm

The swivelling shower arm can easily be swivelled to the left or to the right, giving you all-round flexibility in the shower, even in tight spaces.

Water-bearing sliding wall bar


The water-bearing sliding wall bar can be shortened as required. The pipe-in-pipe system ensures that it never gets too hot, which prevents scalding.

Rotatable cone

KWC shower hoses come with a rotatable cone as standard. This prevents the hose from becoming twisted, even if it is moved around a lot.

Spray holder with 3D function

The hand shower can be positioned at whatever angle you like and is guaranteed to stay firmly in place, not least thanks to the lockable elevation adjustment system.

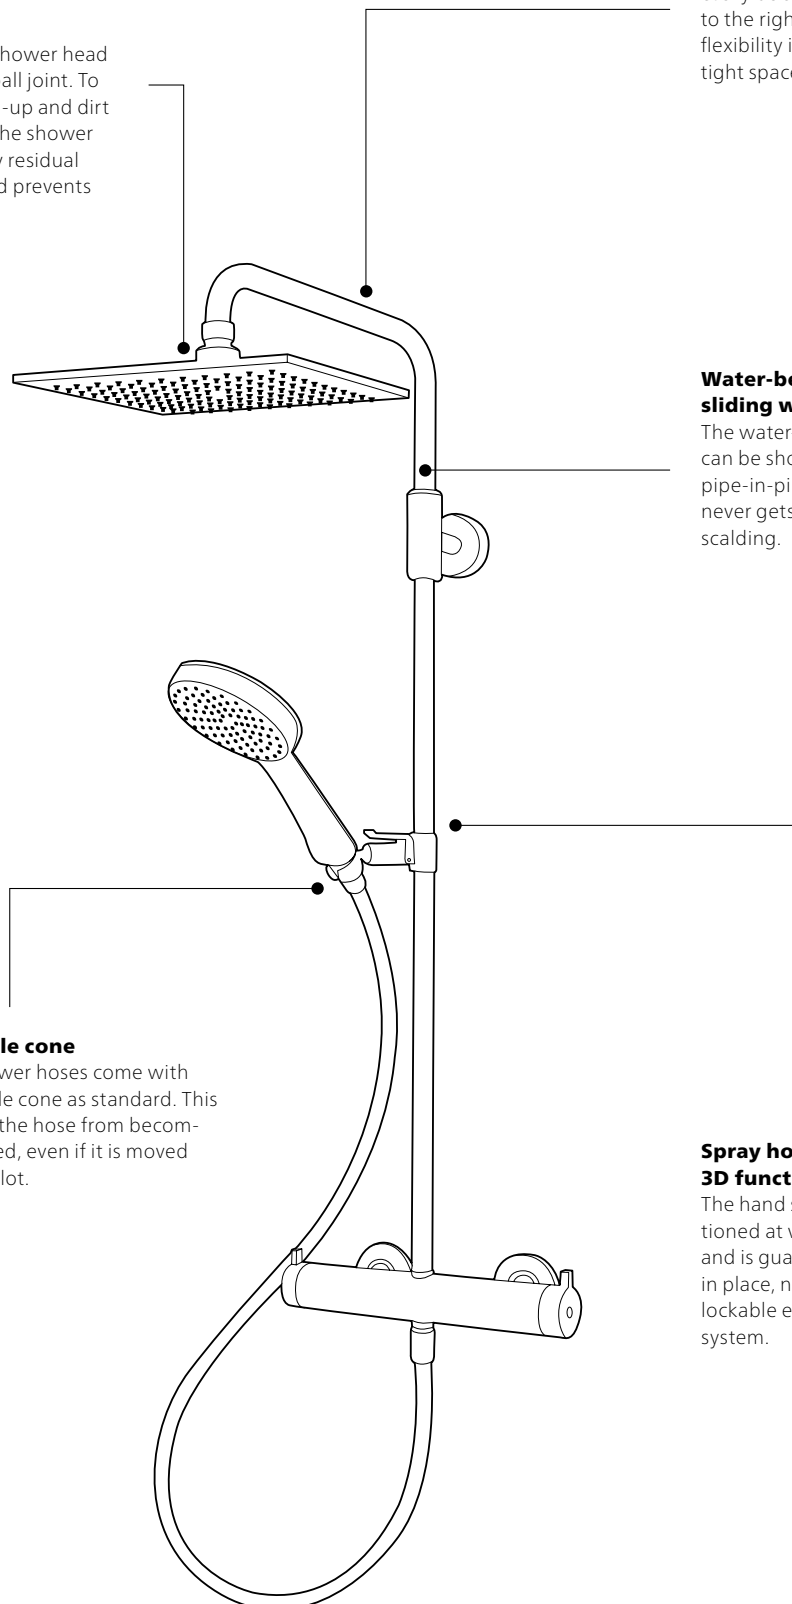

**Basin**

Lever mixer
– Fixed spout

12.198.041.000FL all chrome
A 110, with pop-up valve
12.198.051.000FL all chrome
A 110, without pop-up valve


Flow rate 6 l/min (3 bar)

**Basin
cold water flow in central lever
position**

Lever mixer
coolfix® – cold water flow in central lever
position
– Fixed spout

12.191.031.000FL all chrome
A 110, with pop-up valve
12.191.071.000FL all chrome
A 110, without pop-up valve

Flow rate 7,5 l/min (3 bar)

**Basin**

Lever mixer
– Fixed spout

12.198.042.000FL all chrome
A 125, with pop-up valve
12.198.052.000FL all chrome
A 125, without pop-up valve


Flow rate 6 l/min (3 bar)

**Basin
cold water flow in central lever
position**

Lever mixer
coolfix® – cold water flow in central lever
position
– Fixed spout

12.191.032.000FL all chrome
A 125, with pop-up valve
12.191.072.000FL all chrome
A 125, without pop-up valve


Flow rate 7,5 l/min (3 bar)

**Basin KWC AVA-S**

Lever mixer
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.198.040.000FL all chrome
A 100, with pop-up valve
12.198.050.000FL all chrome
A 100, without pop-up valve

Flow rate 6 l/min (3 bar)

**Basin KWC AVA-S
cold water flow in central lever
position**

Lever mixer
coolfix® – cold water flow in central lever
position
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.191.030.000FL all chrome
A 100, with pop-up valve
12.191.070.000FL all chrome
A 100, without pop-up valve

Flow rate 6 l/min (3 bar)

**Bidet**

Lever mixer
– Fixed spout
– ball joint aerator Neoperl® Caché®

13.191.041.000FL all chrome
A 110, with pop-up valve

Flow rate 12 l/min (3 bar)

**Basin**

Lever mixer
– For top-mounted basins
– Fixed spout

12.191.393.000FL all chrome
A 150, with pop-up valve
12.191.093.000FL all chrome
A 150, without pop-up valve

Flow rate 7,5 l/min (3 bar)

**Basin**

Lever mixer
– Lever installation possible on the right or left side
– Swivel spout 180°
– Neoperl® Perlator® SSR, swivelling jet regulator

12.198.131.000FL all chrome
A 135, with pop-up valve
12.198.141.000FL all chrome
A 135, without pop-up valve

Flow rate 6 l/min (3 bar)


**Basin**

Lever mixer
– Fixed spout

11.192.033.000 all chrome
A 175, Trim kit
11.192.034.000 all chrome
A 225, Trim kit

To be ordered separately:
Unit for concealed installation ½"
39.193.400.931

Flow rate 7,5 l/min (3 bar)

**Tub**


Lever mixer

- Diverter with automatic reset
- Rotatable spout 45°

20.192.440.000 all chrome
AD 150 +/- 15 mm, without hand shower and hose

Flow rate 20 l/min (3 bar)

Spray outlet: Flow rate 14 l/min (3 bar)

**Tub**


Thermostatic mixer

- smartcontrol – water-saving device
- touchcontrol – the body of the mixer does not become hot
- hotcontrol – temperature handle with safety stop button 38° C
- Fixed spout

20.192.503.000 all chrome
AD 150 +/- 15 mm, A 190, without hand shower and hose

Flow rate 20 l/min (3 bar)

Spray outlet: Flow rate 14 l/min (3 bar)

**Tub**


Trim kit with function unit

- Diverter with automatic reset
- Outflow top and below

20.194.580.000 all chrome
20.194.590.000 all chrome with vacuum breaker
DIN EN 1717

To be ordered separately:
Unit for concealed installation
KWC VAROX 1/2" **39.999.300.931**, with shut-off valves

Flow rate 20 l/min (3 bar)

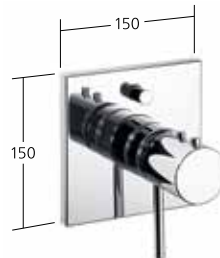**Tub**


Trim kit with thermostatic function unit

- hotcontrol – temperature handle with safety stop button 38° C
- Diverter with automatic reset
- Outflow top and below

20.194.480.000 all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX 1/2" **39.999.300.931**, with shut-off valves

Flow rate 21 l/min (3 bar)

**Accessories**

Bathtub spout

- Fixed spout

26.191.073.000 all chrome
A 200


Flow rate 27 l/min (3 bar)

**Accessories**

Trim kit

27.190.050.000 all chrome

To be ordered separately:
– Unit for concealed installation
– Concealed unit 1/2" **K.38.93.00.931.34**
– Concealed unit 1/2" **39.990.011.931**
– Concealed unit 3/4" **K.38.H3.70.931A35**
– Concealed unit 3/4" **39.990.010.931**




Shower

Lever mixer

21.192.330.000 all chrome
AD 150 +/- 15 mm, without hand shower and hose

Spray outlet: Flow rate 12 l/min (3 bar)



Shower

Thermostatic mixer

- smartcontrol – water-saving device
- touchcontrol – the body of the mixer does not become hot
- hotcontrol – temperature handle with safety stop button 38° C
- Fixed spout

21.192.500.000 all chrome
AD 150 +/- 15 mm, without hand shower and hose

Spray outlet: Flow rate 14 l/min (3 bar)




Shower system

Thermostatic mixer

- smartcontrol – water-saving device
- touchcontrol – neither the body of the mixer nor the water-bearing sliding wall bar becomes hot
- hotcontrol – temperature handle with safety stop button 38° C
- Sliding wall bar can be shortened to a specific length as required.

26.196.213.000 all chrome
AD 150 +/- 15 mm, A 300, with hand shower and hose

Spray outlet: Flow rate 12 l/min (3 bar)




Shower

Trim kit with function unit
– Outflow top or below

21.194.580.000 all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX ½" **39.999.300.931**,
with shut-off valves

Flow rate 20 l/min (3 bar)

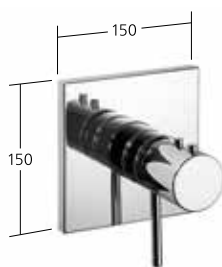

Shower

Trim kit with thermostatic function unit
– hotcontrol – temperature handle with safety stop button 38° C
– Outflow top or below

21.194.480.000 all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX ½" **39.999.300.931**,
with shut-off valves

Flow rate 21 l/min (3 bar)



Shower

Trim kit with thermostatic function unit
– hotcontrol – temperature handle with safety stop button 38° C
– Without diverter
– Outflow top or below

21.194.600.000 all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX ½" **39.999.300.931**,
with shut-off valves

Flow rate 21 l/min (3 bar)



The harmonious
combination of
cylinder and cube





KWC AVA adds a touch of style to your kitchen. With a broad variety of features and functions, this range can be tailored to meet your individual needs, adding sparkle to your day-to-day water use.

**Up and down**

The flat lever is KWC AVA's trademark feature. Elegantly slim, it nevertheless fits extremely snugly in your hand, ensuring that KWC AVA cuts a fine figure in any position.

The soap dispenser: a clean sweep

KWC AVA features a uniform design right down to the soap dispenser. It can be filled with liquid soap for your hands or washing-up liquid for dishes – the choice is yours.



More room for action



Quick and clean

If limescale deposits build up on the faceplate of your faucet, the turn and clean fastening mechanism will come to your aid: simply turn, clean and the job is done.

One way or another

Just one press of the diverter button on the shower head is all it takes to switch from a full Neoperl® spray to a fine needle spray.







Functionality: more is better

**In and out**

This pull-out aerator has both brains and style. It can extend up to 70 cm if you pull it out, but otherwise retires politely and seamlessly back into the spout.

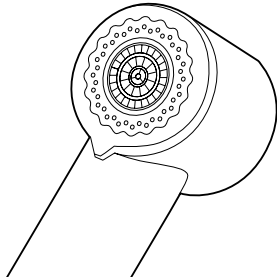**jetclean**

The jetclean faceplate prevents limescale from building up on your kitchen spray and does some of your cleaning work for you. When water is flowing, the cone-shaped holes on the faceplate expand, dislodging any limescale deposits. The holes go back to their normal size when the water flow is switched off.

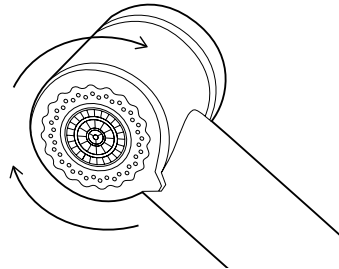**turn and clean (tac)**

If limescale deposits build up on the faceplate of your faucet, the turn and clean fastening mechanism will come to your aid: simply turn, clean and the job is done.





Lever mixer
– Swivel spout 160°

10.191.023.000FL all chrome
A 210
10.191.023.127FL decor steel
A 210

Flow rate 12 l/min (3 bar)



Lever mixer
– Pull-out spray with KWC jetclean
– up to 700 mm pull-out length
– automatic diverter reset
– hose surface to fit faucet surface
– Hose guide, swivelling 130°

10.191.033.000FL all chrome
A 210
10.191.033.127FL decor steel
A 210


Flow rate normal spray 9 l/min (3 bar)
Flow rate needle spray 10 l/min (3 bar)



Lever mixer
– Pull-out aerator
– up to 700 mm pull-out length
– hose surface to fit faucet surface
– Hose guide, swivelling 130°

10.191.113.000FL all chrome
A 210
10.191.113.127FL decor steel
A 210


Flow rate 9 l/min (3 bar)

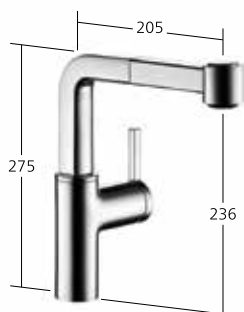

Lever mixer
– Lever installation possible on the right or left side
– Pull-out spray with KWC jetclean
– up to 600 mm pull-out length
– automatic diverter reset
– hose surface to fit faucet surface
– Hose guide, swivelling 360°

10.191.003.000FL all chrome
A 205
10.191.003.127FL decor steel
A 205

Flow rate normal spray 9 l/min (3 bar)
Flow rate needle spray 10 l/min (3 bar)

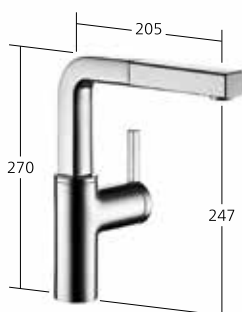

Lever mixer
– Lever installation possible on the right or left side
– Pull-out aerator
– up to 600 mm pull-out length
– hose surface to fit faucet surface
– Hose guide, swivelling 360°

10.191.103.000FL all chrome
A 205
10.191.103.127FL decor steel
A 205

Flow rate 9 l/min (3 bar)




Lever mixer
– Fixed spout

11.192.033.000 all chrome
A 175, Trim kit
11.192.034.000 all chrome
A 225, Trim kit

To be ordered separately:
Unit for concealed installation ½"

39.193.400.931
Flow rate 7,5 l/min (3 bar)



Soap dispensers

Z.536.159.000 all chrome
Z.536.159.127 decor steel



