


**Range:** Timed flow single tap for shower

**Ref:** 27400 - PRESTO DL 400 SE® single tap with straight stop valve

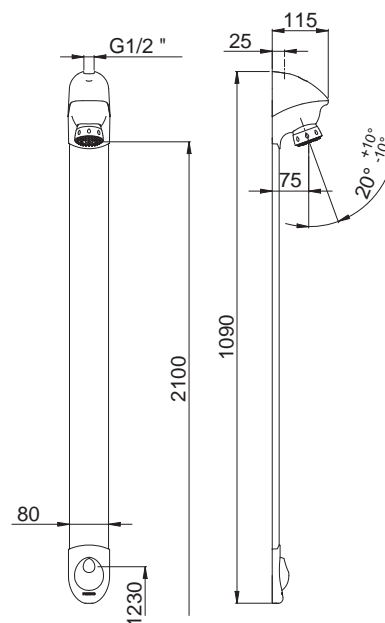

#### > Working pressure :

- 1 to 5 bar

#### > Flow :

- 8 l/min at 3 bar with integrated flow limiter (+ additional 6l/mn limiter)
- Anti-water-hammering design
- Fixed shower head with anti-limescale spikes

#### > Flow time :

- 30 seconds (± 5 sec.)

#### > Hydraulic supply :

- G 1/2" (15x21) Top water inlet with straight stop valve
- For cold or premixed water

#### > Material and colour finish :

- Injected molded metal body and cover
- Extruded cover in aluminium (magnesium-silicon alloy 6060)

#### > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously

#### > Delivered with :

- VBA screws and nylon plugs
- Additional 6l/mn limiter
- M G 1/2" - FG3/4" stop valve and filter
- Instruction manual

#### > Standards & approvals :

- Acoustic class I
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

