



## TECHNICAL DATASHEET

### HEALTHCARE TAPWARE

## MASTERMIX thermostatic washbasin one-hole mixer-Deck-mounted without drainage - 75712




### Benefits of the product

#### MASTERMIX PATENTED RANGE

- French norm "NF Medical" certified
- Ingenious combination of a ceramic cartridge and thermostatic cartridge: safety and reliability.
- No cross-connection between hot water and cold water.
- Without check-valves
- Body with smooth interior: limits the risk of bacterial proliferation
- Dual safety temperature limiter (38°C and 41°C) and adjustment of maximum flow limiter
- Temperature stability and anti-scalding safety
- Quick and easy Installation and maintenance.
- Safe thermal shock: only accessible by technical staff

### Description

Washbasin thermostatic tablet without mixing chamber under pressure (avoiding DHW and DCW intercommunication upstream of the shutter), with MASTERMIX conception, equipped with ergonomic swivel knobs, in chrome-plated zamak. French norm "NF Medical" certified. Temperature knob with dual temperature limiter 38°C and 41°C. Safety temperature unlocking for thermal shock, and accessible only by technical staff, without dismantling the knob. M10X1 hoses LN G'3/8 Lg 360 mm, with filter seals. Adjustable maximum flow rate 6/9/12L / min by the technical manager, temperature adjustable from 18° to 41°C. Flow rate knob in chrome-plated zamak, with adjustable maximum limiter. Unique and patented anti-intercommunication hot water (HW) and cold water (CW) system: removal of check valves on the HW and CW mixer inlets. Combination of a compliant French Norm EN1111 thermostatic cartridge and ceramic cartridge. 3-year warranty for thermostatic cartridge and 10-year warranty for the tap. REF: 75712, MASTERMIX technology, brand SANIFIRST or equivalent approved.

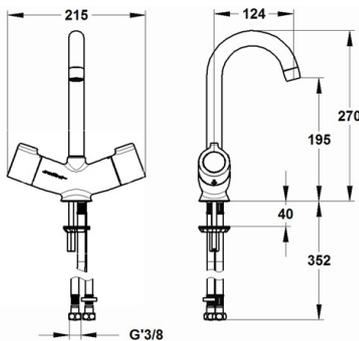



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75712
<b>Previous reference</b>	NC
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defect / 3 years for the thermostatic cartridge
<b>Special feature 2</b>	Swivel spout
<b>Special feature 3</b>	Tabletop
<b>Special feature 4</b>	Thermostatic mixer
<b>Height to nozzle (mm)</b>	191
<b>Projection (mm)</b>	125
<b>Clip-on spout</b>	No
<b>Drainage</b>	Without drainage
<b>Lever</b>	Chrome-plated zamak knobs
<b>Connection</b>	M10x1 hose - EP G'3/8 Lg 360 mm
<b>Flow rate</b>	Factory settings: 6 L/min at 3 bar
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar with a pressure differential less than 1 bar
<b>Maximum pressure</b>	5 bar
<b>Classification</b>	E00 Ch2 A3 U3
<b>Cartridge</b>	Ceramic cartridge and thermostatic cartridge compliant to French Norm EN 1111
<b>Thermal shock</b>	Yes